


CONNECT 228

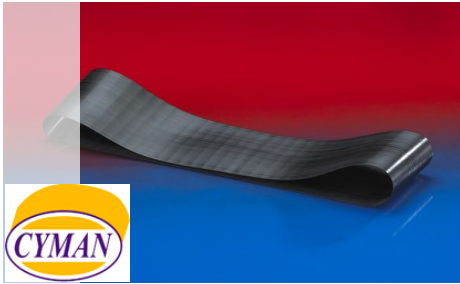

Elastic clamp protection tape

Properties

- easily and quickly fitted
- re-usable
- highly abrasion resistant
- good resistance to oil, gasoline and chemicals
- conforms to RoHS guideline

- conforms to RoHS guideline
- REACH according to --> Technology / Technical Information / REACH

Temperature Range

- -40°C to 90°C
- short time to 125°C

Design

- wall: polyurethane

Delivery variants

- further diameters available on request
- black (standard)
- special colours: full coloured

Suitable for Hose I.D. (mm)	Order No.
1,5 / 38	228-0038-0000
2 / 50-51	228-0050-0000
2,36 / 60	228-0060-0000
2,5 / 63-65	228-0063-0000
3 / 75-76	228-0075-0000
3,5 / 89-90	228-0090-0000
4 / 100-102	228-0100-0000
4,5 / 114-115	228-0115-0000
5 / 125-127	228-0125-0000
6 / 150-152	228-0150-0000
6,3 / 160	228-0160-0000
6,5 / 165	228-0165-0000
7 / 178-180	228-0180-0000
8 / 200-203	228-0200-0000

Accessories



CONNECT 270-271



CLAMP 212