NORPLAST® PVC 383 WEAR STRIP (LD)

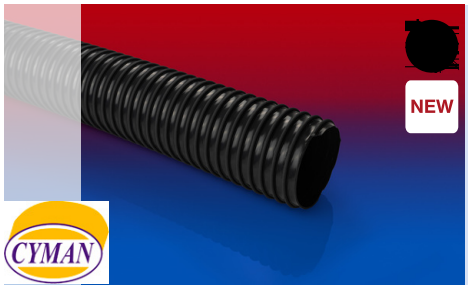

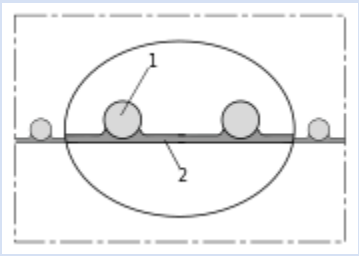

PVC hose, light, external protection profile

Application
- flexible hose/ ducting for gases and for dust, powder, fibres
- galvanic extraction
- agricultural industry: irrigation, fertilizers, insecticides
- caravan/ trailer, mobile home/ camper/ RV, boat, ship/ vessel, yachts: sanitary installation, water supply
- X-ray machine: cable protection conduit (special type on request)
- magnetic resonance scanner, MRI : cable protection conduit, air supply hose (special type on request)
- medical equipment/ medical technology, healthcare sector: cable protection conduit, air supply hose, extraction hose
- scrubber, floor cleaning machine
- scrubber, floor cleaning machine
- vacuum lifting equipment, vacuum handling system

Properties
- light weight
- good resistance to alkalis and acids
- conforms to RoHS guideline

Temperature Range
- -5 °C to 60 °C

Design
- hard plastic spiral integrated in wall
- spiral: rigid PVC
- smooth interior
- wall: soft PVC
- abrasion resistant protection profile (wear strip)

Delivery variants
- further diameters and lengths available on request
- grey (standard)

I.D. (in / mm)	outer Ø (mm)	Pressure (bar)	Vacuum (bar)	Bending Radius (mm)	Weight (kg/m)	Dimensions in Stock (m)	Production Lengths (m)	Order No.
- / 20	26.00	-	-	0.00	0.00	-	25 50	383-0020-2000
1 / 25	31.00	-	-	0.00	0.00	**25 50**	-	383-0025-2000
- / 30	36.00	-	-	0.00	0.00	**25 50**	-	383-0030-2000
1,25 / 32	38.00	-	-	0.00	0.00	**25 50**	-	383-0032-2000
1,36 / 35	45.00	-	-	0.00	0.00	**25 50**	-	383-0035-2000
1,5 / 38	45.00	-	-	0.00	0.00	**25 50**	-	383-0038-2000
- / 40	47.00	-	-	0.00	0.00	**25 50**	-	383-0040-2000
1,75 / 44-45	0.00	-	-	0.00	0.00	**25 50**	-	383-0045-2000
2 / 50-51	58.50	-	-	0.00	0.00	**25 50**	-	383-0050-2000
2,36 / 60	68.00	-	-	0.00	0.00	**25 50**	-	383-0060-2000
2,5 / 63-65	72.50	-	-	0.00	0.00	**25 50**	-	383-0063-2000
- / 70	79.00	-	-	0.00	0.00	**25 50**	-	383-0070-2000
3 / 75-76	84.00	-	-	0.00	0.00	**25 50**	-	383-0075-2000
- / 80	89.00	-	-	0.00	0.00	**25 50**	-	383-0080-2000
3,5 / 89-90	100.00	-	-	0.00	0.00	**15 30**	-	383-0090-2000
4 / 100-102	111.50	-	-	0.00	0.00	**15 30**	-	383-0100-2000
- / 110	121.00	-	-	0.00	0.00	-	15 30	383-0110-2000
4,72 / 120	131.00	-	-	0.00	0.00	-	15 30	383-0120-2000
5 / 125-127	137.50	-	-	0.00	0.00	**15 30**	-	383-0125-2000
5,5 / 140	152.00	-	-	0.00	0.00	-	15 30	383-0140-2000
6 / 150-152	163.50	-	-	0.00	0.00	**15**	-	383-0150-2000
6,3 / 160	174.00	-	-	0.00	0.00	-	10	383-0160-2000
7 / 178-180	194.00	-	-	0.00	0.00	-	10	383-0180-2000

NORPLAST® PVC 383 WEAR STRIP (LD)

I.D.	outer Ø	Pressure	Vacuum	Bending Radius	Weight	Dimensions in Stock	Production Lengths	Order No.
(in / mm)	(mm)	(bar)	(bar)	(mm)	(kg/m)	(m)	(m)	
8 / 200-203	218.00	-	-	0.00	0.00	-	10	383-0200-2000
- / 250	266.00	-	-	0.00	0.00	-	10	383-0250-2000

Accessories

CONNECT MOULD ASSEMBLY 233

CONNECT 223

CONNECT 270-271



CONNECT 228

CLAMP 208